

# PROTECT EURO Pallet Shipper 172 - 495 I

## Modular Euro pallet transport system

The fully qualified Pallet Shipper in its basic configuration of 1200 x 800 mm offers sufficient space to safely transport large quantities of your temperature-sensitive products in the following temperature ranges:

PROTECT **Ambient** (+15°C to +25°C)

PROTECT **Cool** (+2°C to +8°C)

PROTECT **Frozen** (< -20°C)



The pallet box can be expanded modularly using up to two additional stacking frames. This means the box can be made larger according to your requirements and can be easily and quickly put together by just one person.

The stacking frame is delivered in the base of the box (1 set). This means that you save on costs for logistics and storage when purchasing the box.

**PROTECT AMBIENT**

**PROTECT COOL**

**PROTECT FROZEN**

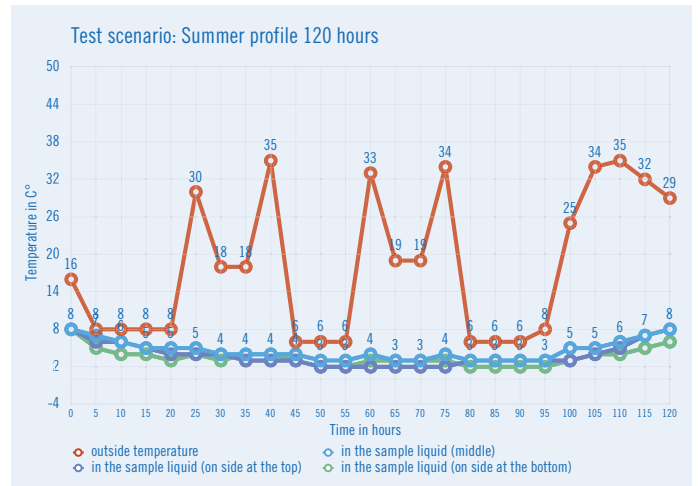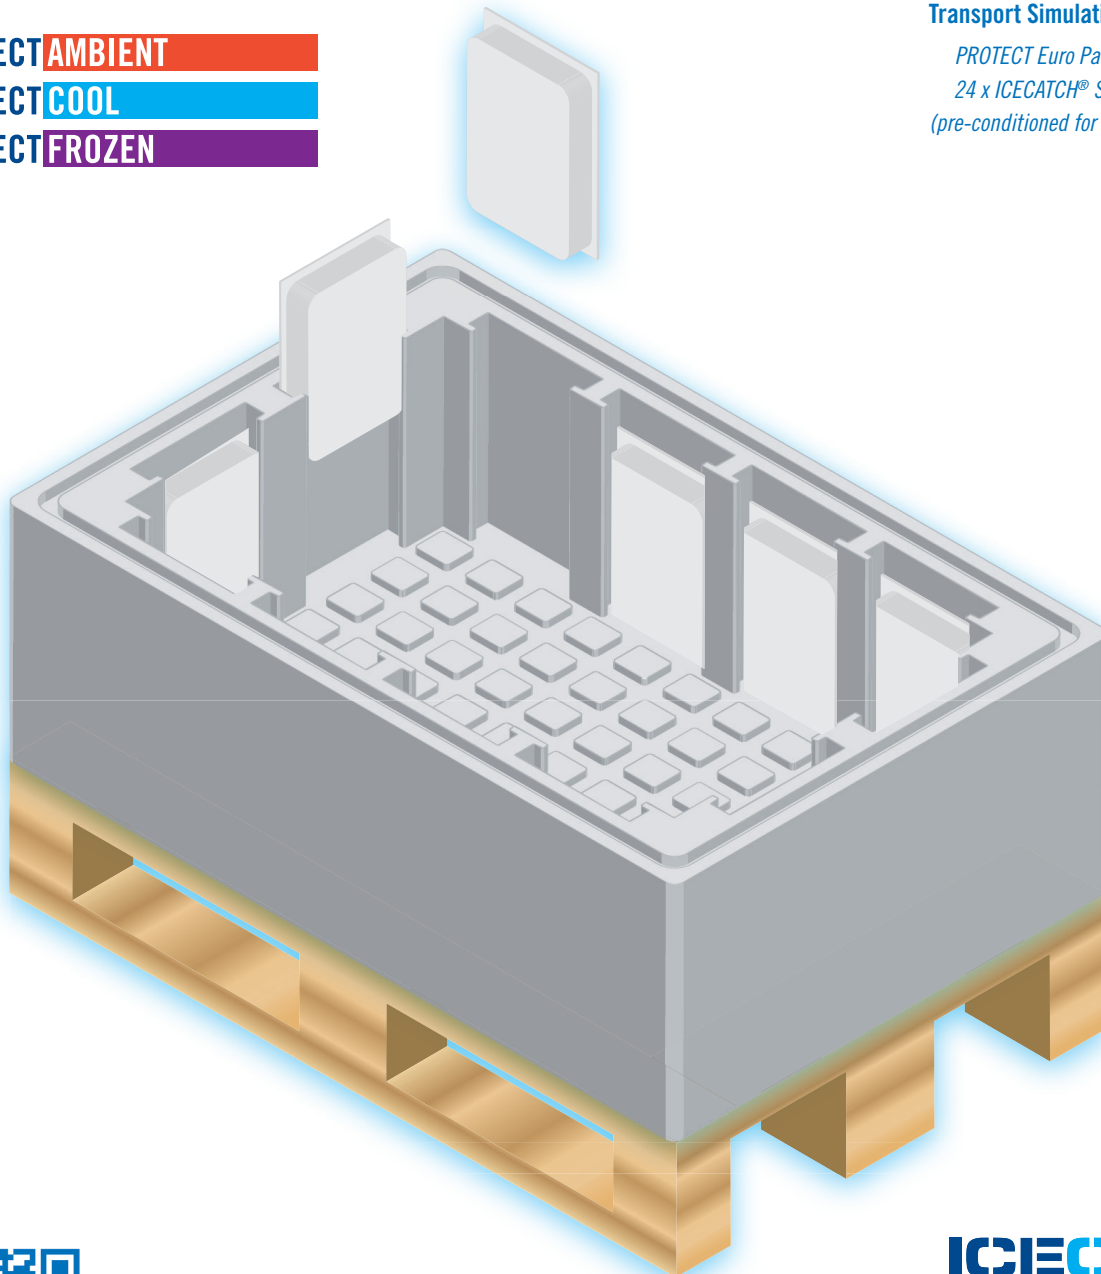

### Transport Simulation Summer 120 Hours

*PROTECT Euro Pallet Shipper (333 l) loaded  
24 x ICECATCH® Solid Insulated 1100g Cool  
(pre-conditioned for min. 72 hrs. at ca. -20°C)*




You can find more information  
in our film gallery.

**ICECATCH®**  
Advanced Cooling Solutions  
an **eutecma** brand

eutecma gmbh · Tel. +49 (0) 621-1282526-0 · [www.eutecma.com](http://www.eutecma.com) · [info@eutecma.com](mailto:info@eutecma.com)

### 1. Delivery & Storage

The qualified PROTECT pallet box consists of a base, a stacking frame and a lid. The system packing components are delivered hygienically sealed, dismantled and stacked inside each other on a pallet. This makes compact transport and storage possible.

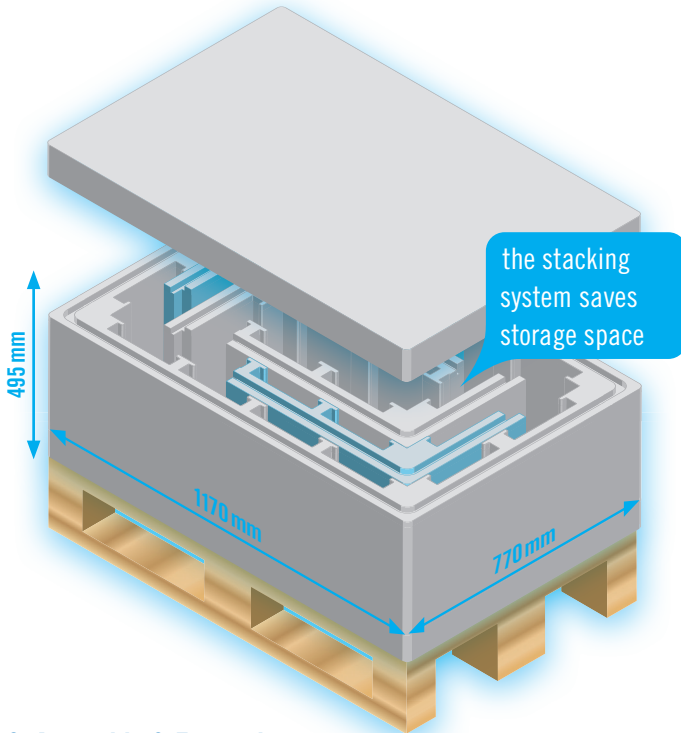


### 2. Assembly & Expansion

The pallet box can be assembled in no time at all by one person using the L-shaped frame elements. The base plate can be expanded to the shipping volume you need by adding a maximum of two stacking frames.

The useable interior volume of the PROTECT Euro Pallet Shipper is:

	Useable interior volume (L x W x H) in mm	Outer dimensions
base incl. lid:	172 l.....960x560x320	.....1170x770x495
+ 1 stacking frames:	333 l.....960x560x620	.....1170x770x795
+ 2 stacking frames:	495 l.....960x560x920	.....1170x770x1095

Dimensions in mm

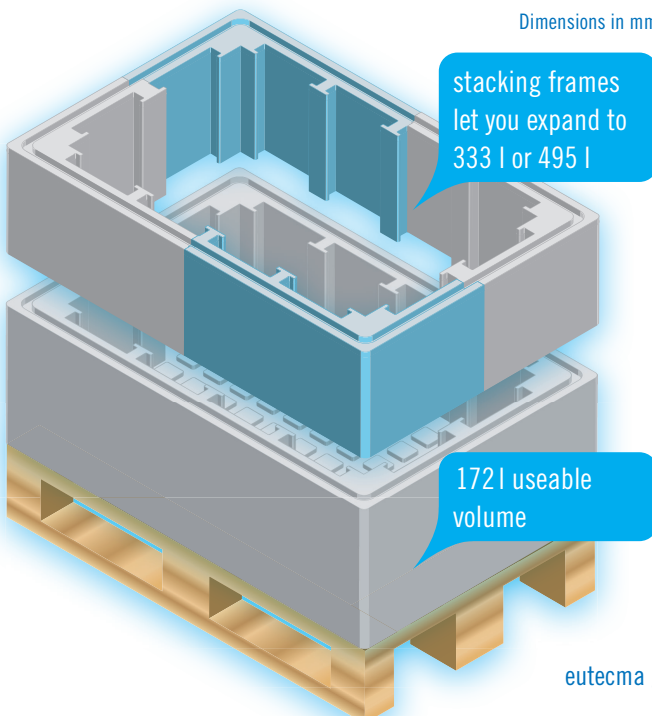

### 3. Adding Cool Bricks


Like all PROTECT packaging solutions, PROTECT Euro Pallet Shipper can be equipped with the exactly the right number of cool bricks to meet your temperature needs.

Slots in the sides of the stacking frames allow as many cool bricks as needed to be quickly and easily fitted into clearly defined positions, even if the PROTECT Euro Pallet Shipper has already been filled with product.

PROTECT **Ambient** (+15°C to +25°C): ICECATCH® Solid Ambient 800 g

PROTECT **Cool** (+2°C to +8°C): ICECATCH® Solid Insulated Cool 1100 g

PROTECT **Frozen** (< -20°C): ICECATCH® Solid Frozen (or dry ice)

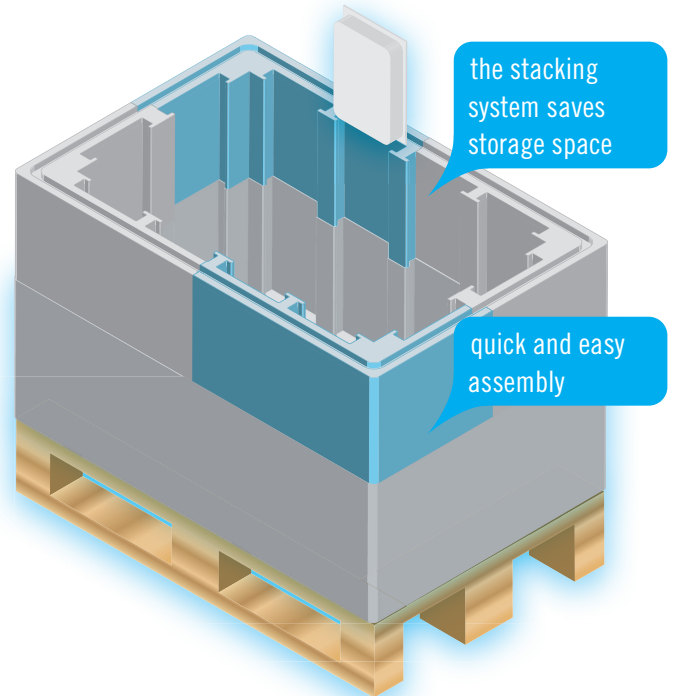

#### The advantages of the PROTECT Euro Pallet Shipper:

- \* Qualified solution for transporting products for up to 120 hours
- \* Can be expanded in modules
- \* Secure packaging for transporting your temperature-sensitive products in the temperature ranges of +2°C to +8°C, +15°C to +25°C and < -20°C
- \* Can be easily assembled by one person
- \* Compact for transport and storage
- \* Can be used over and over again
- \* Available in EPS or Neopor