PROTECT EURO Pallet Shipper 172-495 I

Modular Euro pallet transport system

The fully qualified Pallet Shipper in its basic configuration of 1200 x 800 mm offers sufficient space to safely transport large quantities of your temperature-sensitive products in the following temperature ranges:

PROTECT Ambient (+15°C to +25°C)

PROTECT **Cool** $(+2^{\circ}C \text{ to } +8^{\circ}C)$

PROTECT Frozen (< -20°C)


PROTECT AMBIENT

PROTECT FROZEN

PROTECT COOL

The pallet box can be expanded modularly using up to two additional stacking frames. This means the box can be made larger according to your requirements and can be easily and quickly put together by just one person.

The stacking frame is delivered in the base of the box (1 set). This means that you save on costs for logistics and storage when purchasing the box.

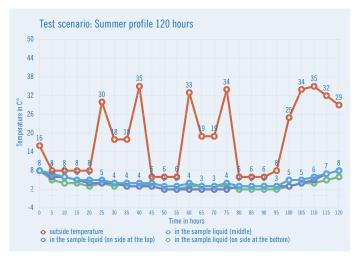

Transport Simulation Summer 120 Hours

PROTECT Euro Pallet Shipper (333 I) loaded 24 x ICECATCH[®] Solid Insulated 1100g Cool (pre-conditioned for min. 72 hrs. at ca. -20°C)



You can find more information in our film gallery.


eutecma gmbh · Tel. +49 (0) 621-493 078-0 · www.eutecma.com · info@eutecma.com

Advanced Cooling Solutions

an eutecma brand

1. Delivery & Storage


The qualified PROTECT pallet box consists of a base, a stacking frame and a lid. The system packing components are delivered hygienically sealed, dismantled and stacked inside each other on a pallet. This makes compact transport and storage possible.

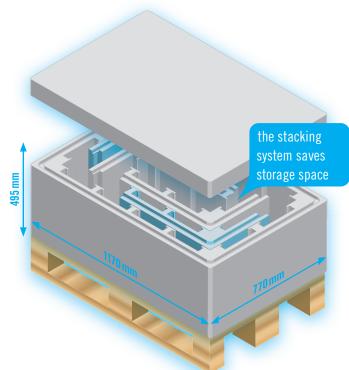

2. Assembly & Expansion

The pallet box can be assembled in no time at all by one person using the L-shaped frame elements. The base plate can be expanded to the shipping volume you need by adding a maximum of two stacking frames. The useable interior volume of the PROTECT Euro Pallet Shipper is:


Use	able interior volum	e (L x W x H) in mm	Outer dimensions
base incl. lid:	172 I	960 x 560 x 320	1170x770x495
+ 1 stacking frames:	333 I	960 x 560 x 620	1170x770x795
+ 2 stacking frames:	495 I	960 x 560 x 920	1170 x 770 x 1095
			Dimensions in mm



3. Adding Cool Bricks

Like all PROTECT packaging solutions, PROTECT Euro Pallet Shipper can be equipped with the exactly the right number of cool bricks to meet your temperature needs.

Slots in the sides of the stacking frames allow as many cool bricks as needed to be quickly and easily fitted into clearly defined positions, even if the PROTECT Euro Pallet Shipper has already been filled with product. PROTECT Ambient (+15°C to +25°C): ICECATCH® Solid Ambient 800 g PROTECT Cool (+2°C to +8°C): ICECATCH® Solid Insulated Cool 1100 g PROTECT Frozen (< -20°C): ICECATCH® Solid Frozen (or dry ice)

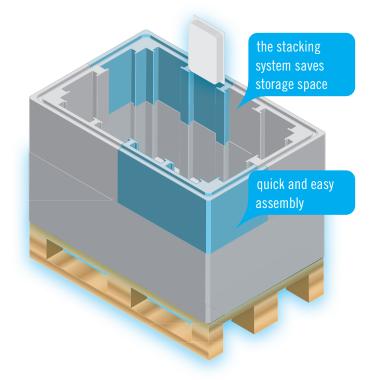

The advantages of the PROTECT Euro Pallet Shipper:

- * Qualified solution for transporting products for up to 120 hours
- * Can be expanded in modules
- * Secure packaging for transporting your temperaturesensitive products in the temperature ranges of +2°C to +8°C, +15°C to +25°C and < -20°C</p>
- * Can be easily assembled by one person
- * Compact for transport and storage
- * Can be used over and over again
- * Available in EPS or Neopor

