

PROTECT ½ Euro Pallet Shipper 49-1411

Modular solution for transport on a Pallet Shipper

The fully qualified Pallet Shipper in its basic configuration of 790x590 mm offers sufficient space to safely transport large quantities of your temperature-sensitive products in the following temperature ranges:


PROTECT **Ambient** (+15°C to +25°C)

PROTECT **Cool** (+2°C to +8°C)

PROTECT **Frozen** (< -20°C)

The PROTECT ½ Euro Pallet Shipper can be modularly expanded with two additional stacking frames. This means the box can be made larger according to your requirements and can be easily and quickly put together by just one person.

If further cooling elements are required, these can be added in the optional ice frame.

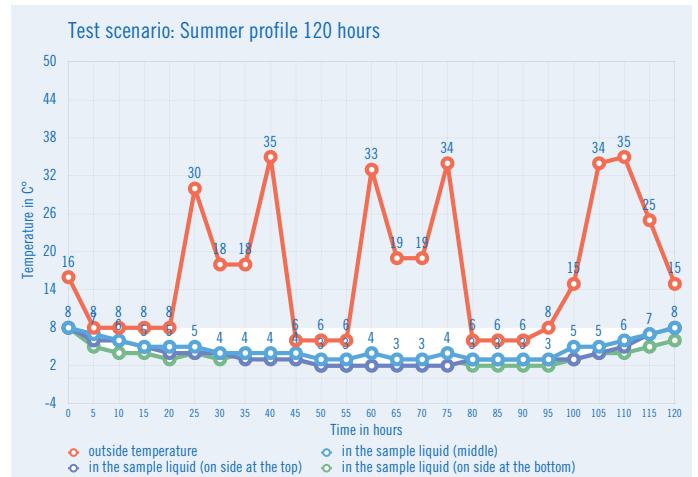


PROTECT **AMBIENT**

PROTECT **COOL**

PROTECT **FROZEN**

Transport Simulation Summer 120 Hours

PROTECT ½ Euro Pallet Shipper was loaded with a total of 6 cooling elements ICECATCH® Solid Insulated 1100g Cool (pre-conditioned for min. 72 hrs. at ca. -20°C)

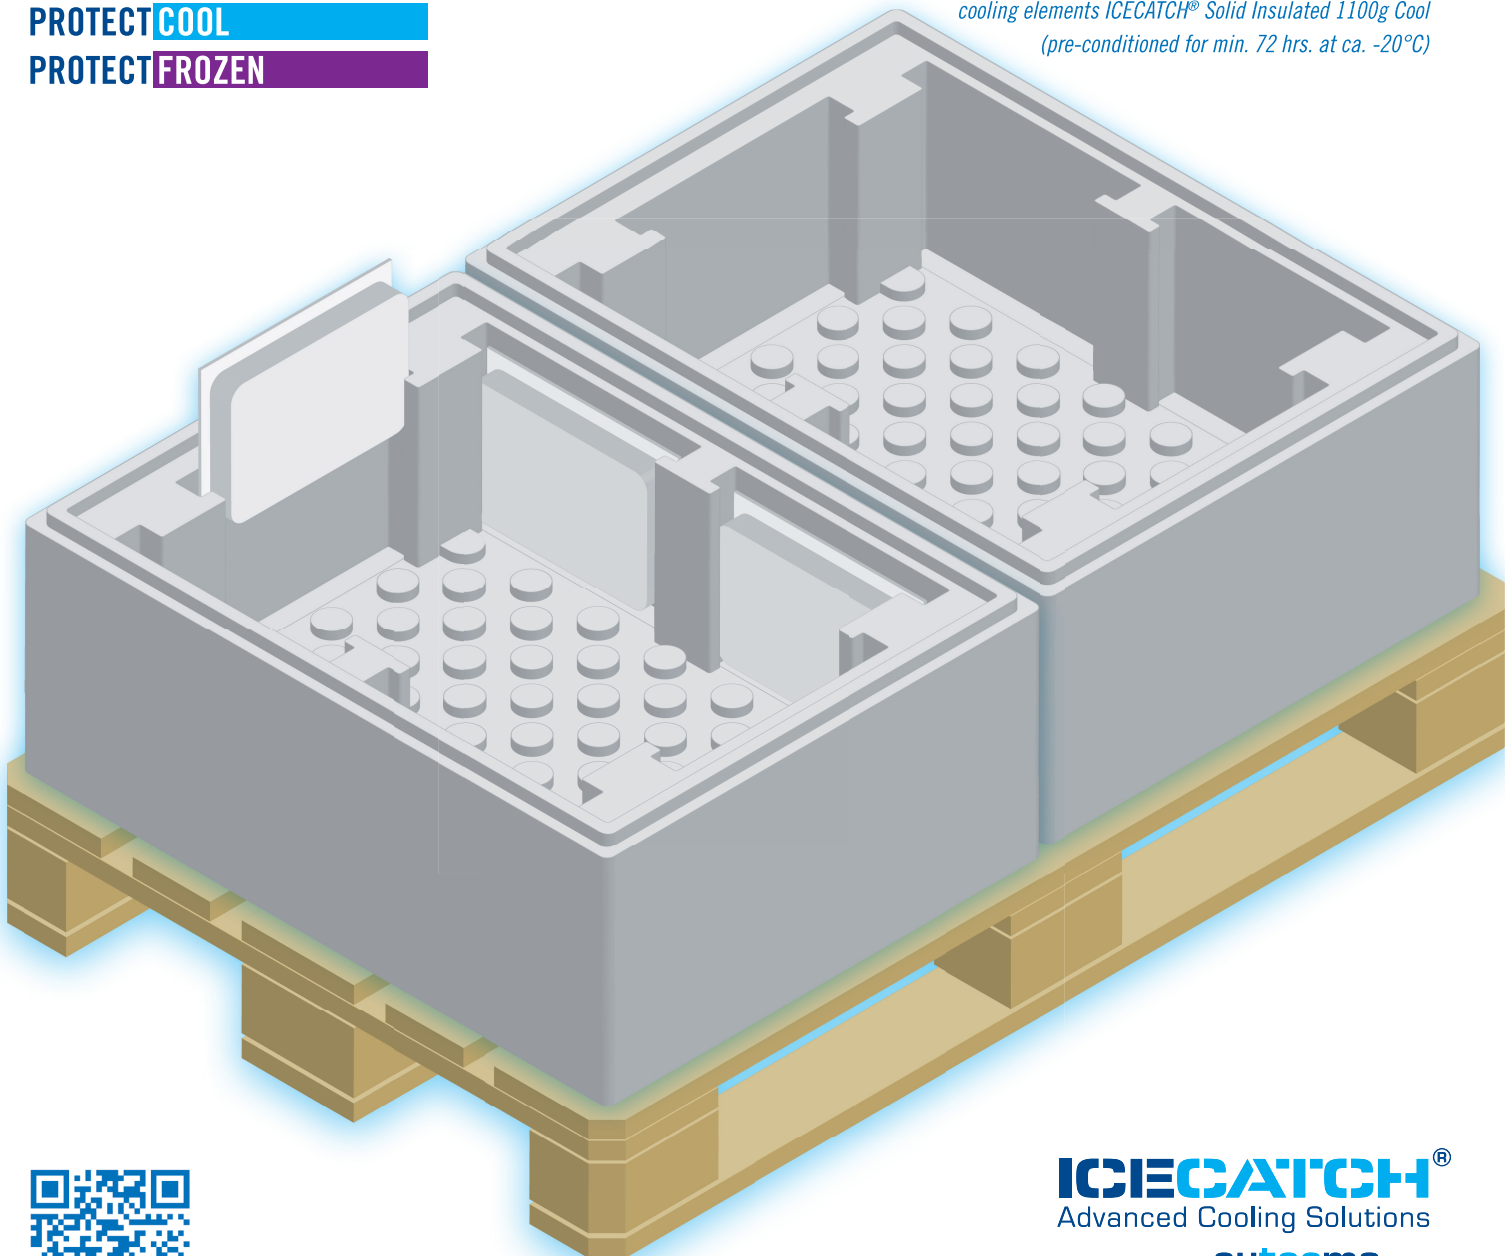

You can find more information
in our film gallery.


ICECATCH®
Advanced Cooling Solutions
an **eutecma** brand

eutecma gmbh · Tel. +49 (0) 621-1282526-0 · www.eutecma.com · info@eutecma.com

1. Delivery & Storage

The qualified ½ PROTECT pallet box consists of a base, the corresponding number of stacking frames and a lid. It is possible to place additional cooling elements in an optional ice frame above the goods.

The system packaging is delivered in a hygienically closed condition.

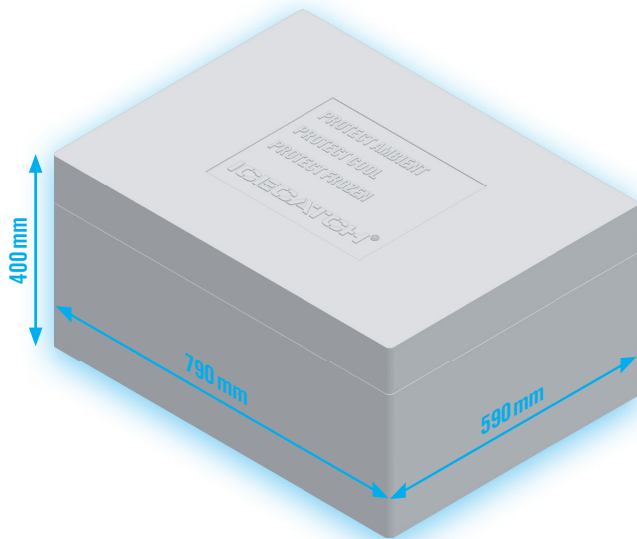


2. Assembly & Expansion

The lower part can be enlarged by two stacking frames as required.

The useable interior volume of the PROTECT ½ Euro Pallet Shipper is:

	Useable interior volume (L x W x H) in mm	Outer dimensions
base incl. lid:	49 l565 x 405 x 215	790 x 590 x 400
+ 1 stacking frames:	95 l565 x 405 x 415	790 x 590 x 600
+ 2 stacking frames:	141 l565 x 405 x 615	790 x 590 x 800
Opt. Iceframe		790 x 590 x 100

Dimensions in mm

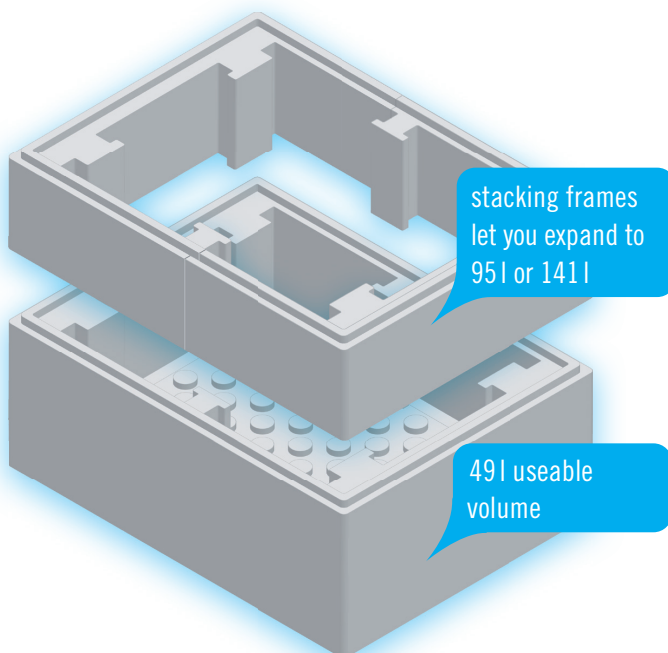

3. Adding Cool Bricks



Like all PROTECT packaging solutions, PROTECT ½ Euro Pallet Shipper can be equipped with exactly the right number of cool bricks to meet your temperature needs.

Slots on the side of the predefined stacking frame allow at all time to assemble and equip the PROTECT 1/2 Euro Pallet Shipper easily and fast, although it is already loaded.

PROTECT **Ambient** (+15°C to +25°C): ICECATCH® Solid Ambient 800 g

PROTECT **Cool** (+2°C to +8°C): ICECATCH® Solid Insulated Cool 1100 g

PROTECT **Frozen** (< -20°C): ICECATCH® Solid Frozen (or dry ice)

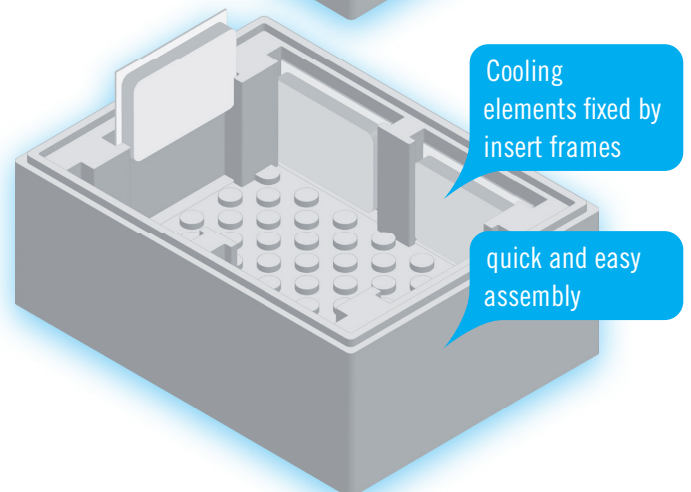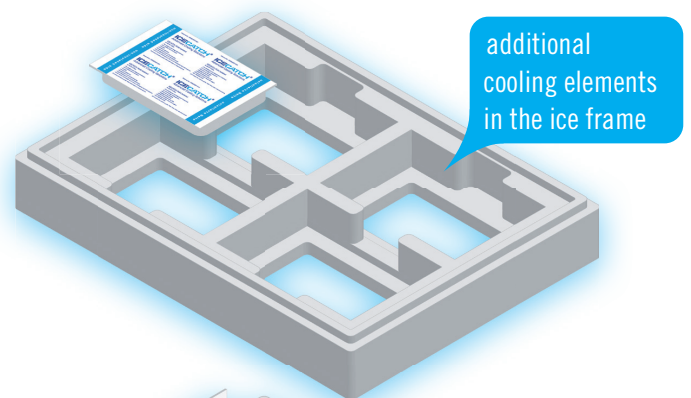

The advantages of the PROTECT ½ Euro Pallet Shipper:

- * Qualified solution for transporting products for up to 120 hours
- * Can be expanded in modules
- * Secure packaging for transporting your temperature-sensitive products in the temperature ranges of +2°C to +8°C, +15°C to +25°C and < -20°C
- * Can be easily assembled by one person
- * Compact for transport and storage
- * Can be used over and over again
- * Available in EPS or Neopor

ICECATCH®
Advanced Cooling Solutions
an **eutecma** brand